

MAXIMATOR®

Maximum Pressure.




High Pressure Technology • Testing Equipment
Hydraulics • Pneumatics

Technical Data Sheet

G500 (L)S

» Oil and Water service

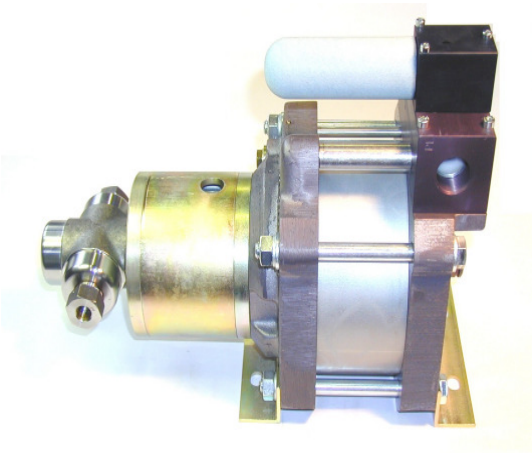

G500 (L)S
single acting, single air drive head, side inlet
(Bottom inlet not available)

Technical Data:

Air drive pressure:	1-10 bar / 14,5 - 145psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi:	4,500 bar/ 65,250 psi
Pressure ratio:	1:519
Displacement volume/double stroke	1.9 cm ³ / 0.12 cu.inch

Connections:

Inlet:	1/4 BSP
Outlet:	9/16-18UNF
Air drive:	3/4 BSP
Maximum operating temperature:	60°C
Net weight:	13.5 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package:	G500(L)S: Polyurethan, NBR
Pump Body:	1.4313
Piston:	1.4112 (hardened)
Fittings:	17-4-PH

Approximate Dimensions:

Height:	362 mm
Depth:	181 mm
Width:	272 mm

Available Options:

Special inlet and outlet ports, i.e. NPT	G500(L)S-NPT
Special seal material to handle special fluids on request.	

Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	G500(L) with C2
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	G500(L) with C2/SVair (The required outlet pressure has to be indicated.)


Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

MAXIMATOR®

Maximum Pressure.



High Pressure Technology • Testing Equipment
Hydraulics • Pneumatics

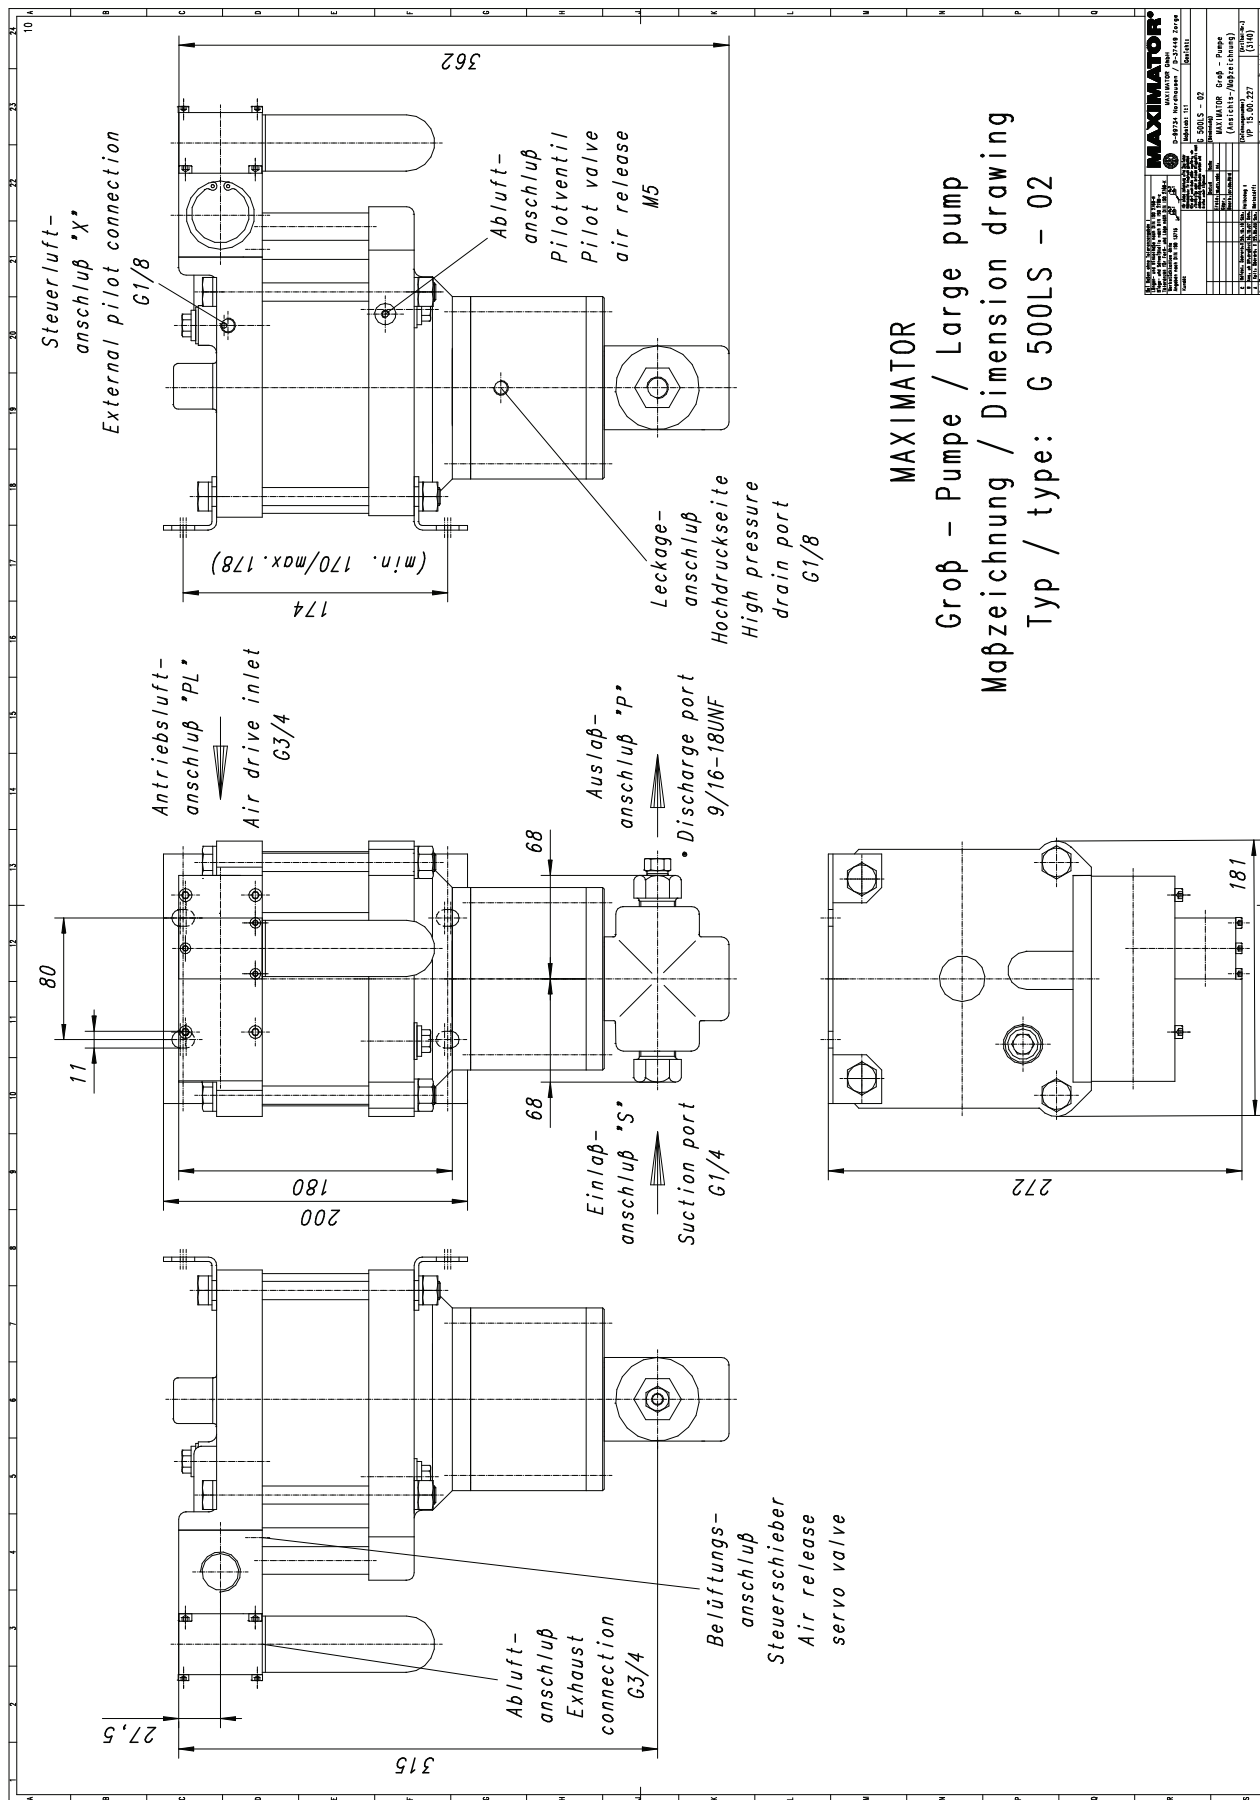

MAXIMATOR
Groß - Pumpe / Large pump
Maßzeichnung / Dimension drawing
Typ / type: G 500LS - 02

MAXIMATOR	
MAXIMATOR G 500LS - 02	
MAXIMATOR Grob - Pumpe (Ansaug-/Ablasschneid)	
DIN 15 801.227	
G 1/8	
M 5	
9/16-18UNF	
G 3/4	
G 1/4	
G 1/8	

Leistungsdiagramm/Performance Graph G 500

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

