

# MAXIMATOR®

## Maximum Pressure.



High Pressure Technology • Testing Equipment  
Hydraulics • Pneumatics


### Technical Data Sheet

G35 (L)

» Oil service

G35 (L) VE

» Water service

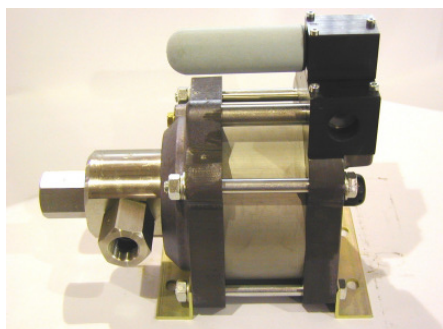

G35 (L)  
single acting, single air drive head  
(Standard= Bottom inlet)

#### Technical Data:

Air drive pressure:	1-10 bar / 14,5 - 145psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi:	400 bar/ 5,800 psi
Pressure ratio:	1:40
Displacement volume/double stroke	24.5 cm <sup>3</sup> / 1.49 cu.inch

#### Connections:

Inlet:	Standard: Bottom Inlet 3/4 BSP
Outlet:	3/4 BSP
Air drive:	3/4 BSP
Maximum operating temperature:	60°C
Net weight:	14.5 kg

Pressure and flow performances, please see enclosed graph.

#### Wetted materials of construction:

Seal package:	G35(L): Polyurethan, NBR G35(L)VE: UHMWPE, FKM
Pump Body:	1.4305
Piston:	1.4112 (hardened)
Fittings:	1.4571

#### Approximate Dimensions:

Height:	296 mm
Depth:	181 mm
Width:	272 mm

#### Available Options:

Seal material for oil service:	G35 (L)
Seal material for water service:	G35(L)VE
Side inlet	G35(L)S/ G35(L)VES
Special inlet and outlet ports, i.e. NPT	G35(L)-NPT G35(L)VE-NPT

Special seal material to handle special fluids on request.

#### Available Accessories:

Air control units with filter pressure regulator, control pressure gauge and shut off valve:	G35(L) with C2
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	G35(L) with C2/SVair (The required outlet pressure has to be indicated.)


Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

# MAXIMATOR®

## Maximum Pressure.



High Pressure Technology • Testing Equipment  
Hydraulics • Pneumatics

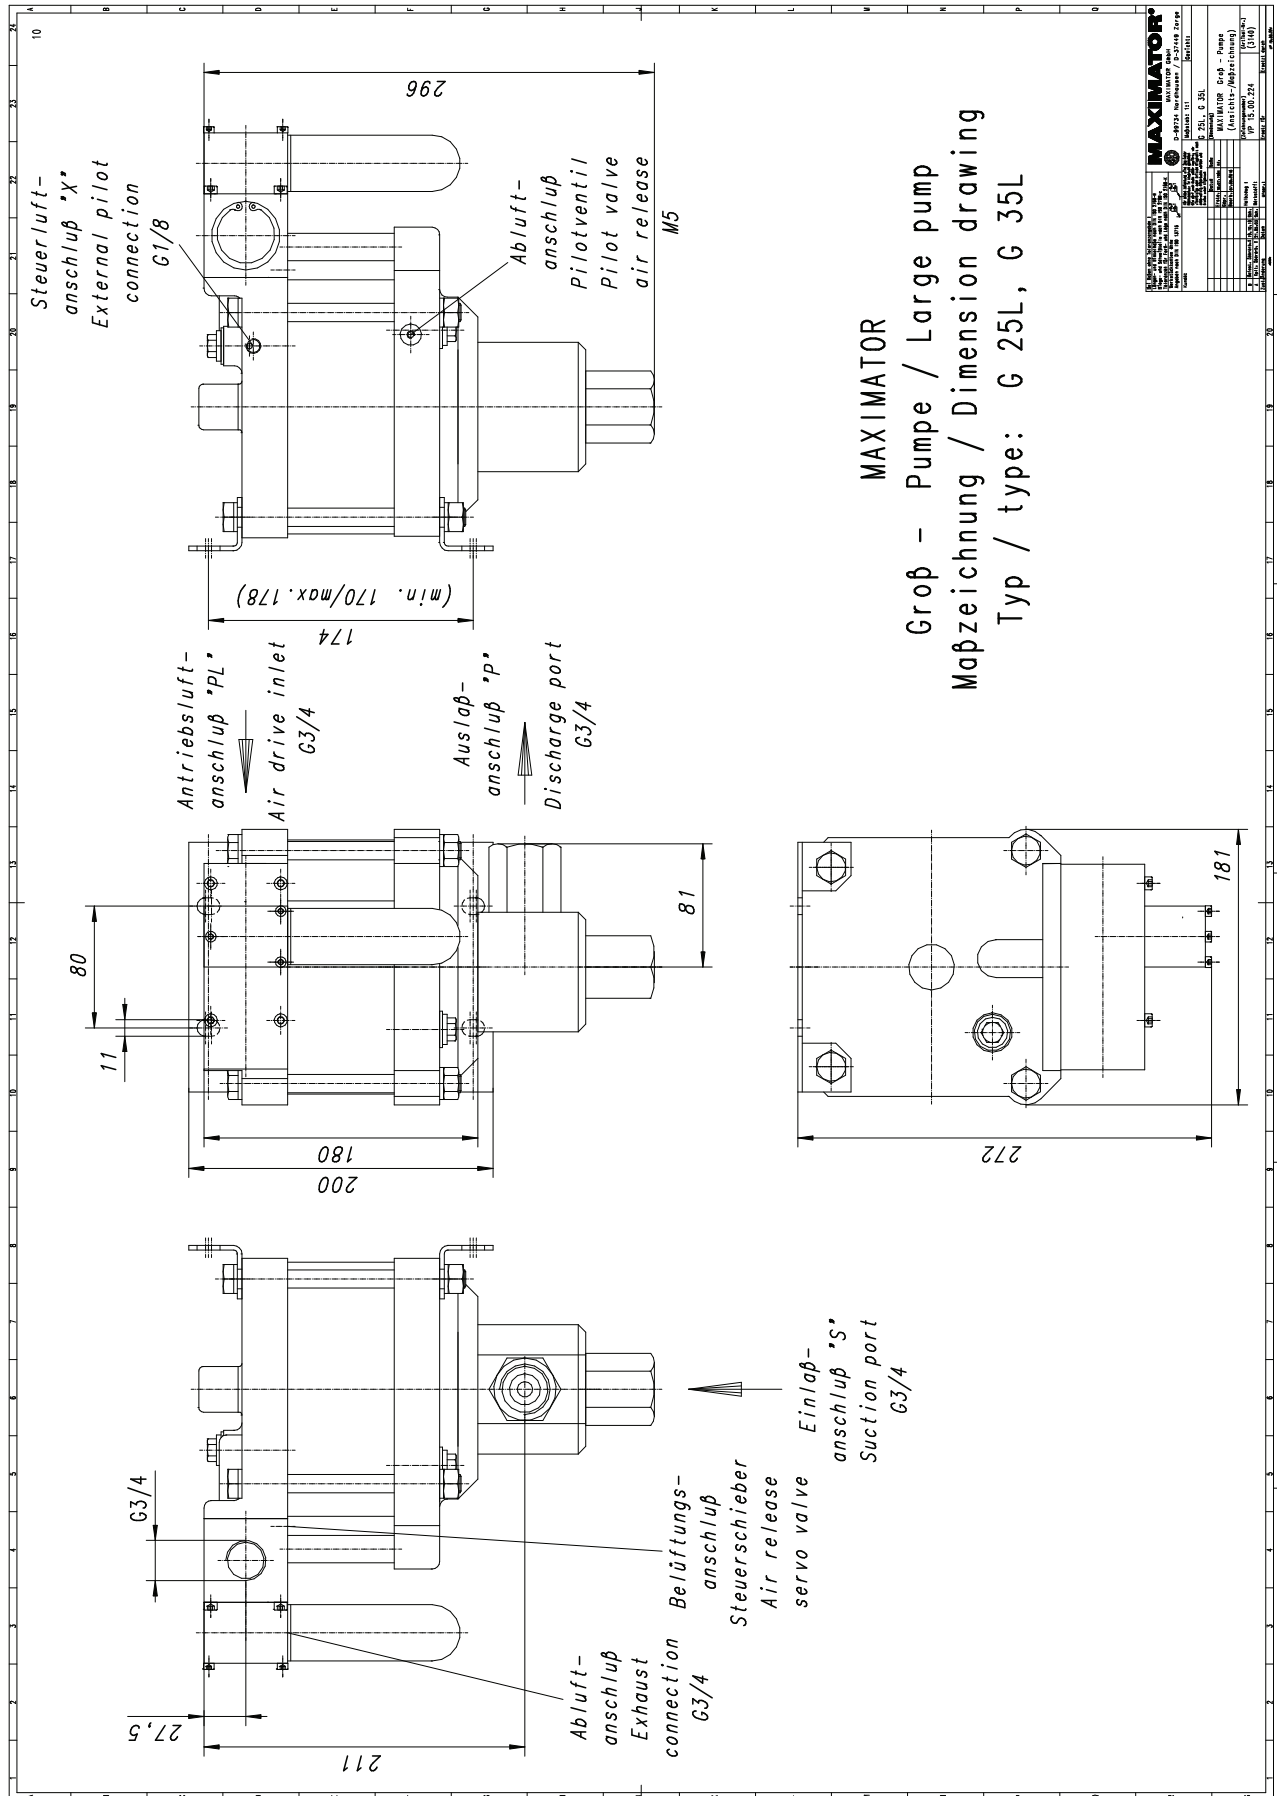

### Leistungsdiagramm/Performance Graph G(SF) 35

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

